

Ref. **1007**


BROCA MANGO REBAJADO HSS. SERIE CORTA

HSS Reduced Shank Drill Bit. Jobber Series

Foret Queue Reduite HSS. Serie Courte



HSS	DIN 338 N	118°					Blue Finish	Rectificado Ground Taillé Meulé	30 mm	Tol. D h8
-----	-----------	------	--	--	--	--	-------------	------------------------------------	-------	--------------

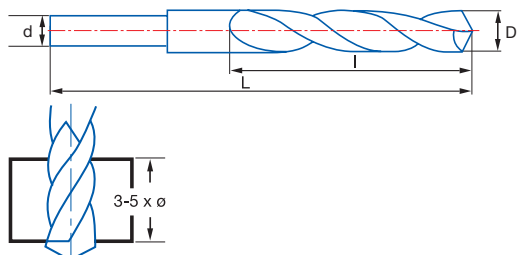

Material		Vc	Avances mm/rev. Feed / Pas			
Grupo	Sub.	HSS	Ø 12	Ø 16	Ø 20	Ø 25
P	P.1	25-30	0,160	0,180	0,250	0,430
K	K.1	30-35	0,250	0,300	0,360	0,360
	K.2	25-30	0,200	0,240	0,280	0,340
N	N.3	60-80	0,320	0,380	0,450	0,540
	N.4		0,320	0,380	0,450	0,540
	N.5	40-50	0,250	0,300	0,360	0,430

Vc= m/min.

$$r.p.m. = \frac{Vc \times 1.000}{\pi \times \phi}$$

D mm	d mm	L mm	l mm		Nº Art. HSS	€
10,50	10,00	133	87	1	15976	7,29
11,00	10,00	142	94	1	15977	8,24
11,50	10,00	142	94	1	15978	8,71
12,00	10,00	151	101	1	15979	9,51
12,50	10,00	151	101	1	15980	10,31
13,00	10,00	151	101	1	15981	10,60
13,50	12,70	160	108	1	15982	14,33
14,00	12,70	160	108	1	15984	15,21
14,50	12,70	169	114	1	15985	16,25
15,00	12,70	169	114	1	15987	16,42
15,50	12,70	178	120	1	15988	18,93
16,00	12,70	178	120	1	15989	19,63
16,50	12,70	184	125	1	15990	22,02
17,00	12,70	184	125	1	15991	22,02

D mm	d mm	L mm	l mm		Nº Art. HSS	€
17,50	12,70	191	130	1	15992	25,05
18,00	12,70	191	130	1	15993	26,38
18,50	12,70	198	135	1	15994	29,10
19,00	12,70	198	135	1	15995	29,10
19,50	12,70	205	140	1	15996	31,71
20,00	12,70	205	140	1	15997	36,53
20,50	12,70	205	145	1	66932	38,65
21,00	12,70	205	145	1	17071	38,65
21,50	12,70	210	150	1	66933	42,62
22,00	12,70	210	150	1	17072	42,62
22,50	12,70	210	150	1	66934	46,63
23,00	12,70	210	150	1	36364	46,63
23,50	12,70	220	160	1	66935	51,45
24,00	12,70	220	160	1	36365	51,45
24,50	12,70	220	160	1	66936	56,09
25,00	12,70	220	160	1	36366	56,09